




TECHNICAL DATA SHEET
PETRONOL HM
A DRY BONDING AGENT

PRODUCT NAME: PETRONOL HM65

CHEMICAL NAME: HEXAMETHOXY METHYL MELAMINE

CHEMICAL STRUCTURE:

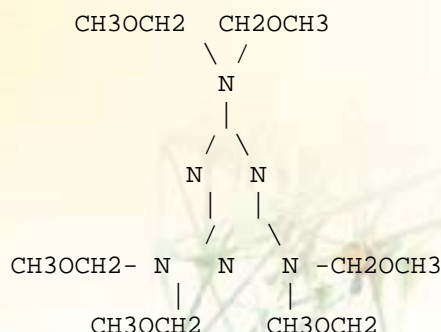

PHYSICAL FORM : White powder .

ACTIVE INGREDIENT: 65% Hexamethoxy methylmelmine & 35% Silica .

ASH AT 85°C % : 30-35

LOSS @ 105 oC% : 7.5 max .

SIEVE RESIDUE AT % : 1 max
20° MESH

FREE FORMALDEHYDE %: 0.1 Max

SOLUBILITY : Partial soluble in alcohol and Tolune .

CLASSIFICATION : DRY BONDING AGENT

OTHER INFORMTION: Free Formaldehyde- 0.1% Max

Loss @ 105oC- 7.5% Max

CHEMICAL FUNCTION: Methylene Donor .


DISCOLORATION STAINING: Non discolouring and non staining .

TOXICOLOGY: Practically non-harmful by ingestion. Not a skin irritant but an eye irritant .

HANDLING PERSONAL: Avoid creating dust and inhalation of PRTECTIONdust. Ensure good ventilation. In case of eye contact wash witt clean water fo 5 to 10 minutes and seek medical advice .

STORAGE : PETRONOL HM has very good storage Statibility. Store in a cool and dry place in closed containers. Avoid extremes of temperature and humidity .

PACKAGING : 25 Kg net in paper bag .

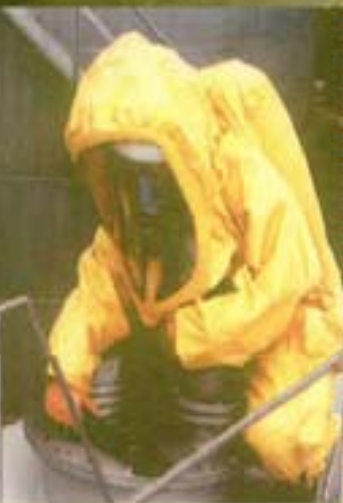



ADVANTAGES OF: Promotes outstanding adhesion between PETRONOL HM rubber and reinforcing cord or fabric. Good compatibility, easy dispersion. No amine or ammonia by-product.

Better scorch protection compared to Hexamine non-blooming. Better storage life of compound.

APPLICATION: PETRONOL HM in combination with PETRONOL RS in rubber compounds, promotes excellent bond strength between the vulcanization and strength member material (textiles and plated- Steel Cords).

This combination is highly effective for bonding not only with diene rubbers (e.g., NR, SBR, CR, NBR etc.) but also with the saturated rubber like EPDM & IIR. Normal dosage varies from 1.5 to 2.5 phr. depending on the type of application. Silica between 10 to 15 phr. added to the compound improves substantial bond strength.

Sulphenamide type of accelerators are preferred for this system. PETRONOL HM offers good processibility.

N.B.: These suggestions have been made for use of PETRONOL HM as A dry bonding agent only as a guideline without any warranty.

